


RP Standard Well Light

STANDARD PREMIUM



PROJECT
CATALOG #
TYPE
NOTES

When power and control are demanded from a subterranean fixture, there is not a more versatile product than the RP. It can be configured to wall wash from tight spaces with a spread beam or provide a long narrow projection of light for a tall palm... even after installation. There is a whole family of accessories to allow the lighting designer to shape, color, and control the glare of light for maximum effect.

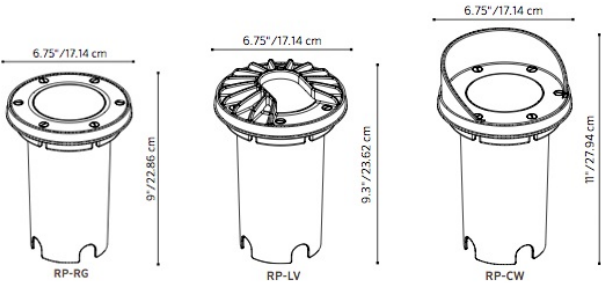

Quick Facts

- Die-cast brass construction
- MR-16 lamp type
- ProAim™ adjustability
- Compatible with Luxor® technology
- Input voltage: 10-15V

About FX Luminaire

As a leading manufacturer of landscape and architectural lighting, FX Luminaire provides innovative products, resources, and support to help customers bring their visions to life. The company offers a range of specification-driven solutions, including fixtures, controls, and accessories, to enhance residential and commercial landscapes.

Warranty

Listings



Fixture	Power	Compliance	Faceplate	Finish
RP	LED20WFL 4.3 VA, 2700K, 35° LED MR-16 lamp (PRO lamp series)	[default] North America (UL Listed)	RG (Ring)	BS Natural Brass
	LED35WFL 8.5 VA, 2700K, 35° LED PAR-36 lamp (ECO lamp series)	E International (CE Certified)	LV Louver	CB Camo Bronze (composite only)
	ZD35WFL 5.4 VA, 2700K, 35° LED MR-16 lamp (ZD lamp series)		CW (Cowling)	DT Desert Tan (composite only)
	NL Lamp not included			

-

-

-

-

EXAMPLE FIXTURE CONFIGURATION: RP-XX-XXXX-XX

MD LED20WFL Illuminance at a Distance

Feet (Meter)	Center Beam	Beam Width
		Vertical 28°
3' (0.9 m)	69.5 fc (748 lx)	1.5' (0.5 m)
6' (1.8 m)	17.4 fc (187 lx)	3.0' (0.9 m)
9' (2.7 m)	7.7 fc (83 lx)	4.4' (1.3 m)
12' (3.7 m)	4.4 fc (47 lx)	5.9' (1.8 m)
15' (4.6 m)	2.8 fc (30 lx)	7.4' (2.3 m)
18' (5.5 m)	1.9 fc (21 lx)	8.9' (2.7 m)

MD LED35WFL Illuminance at a Distance

Feet (Meter)	Center Beam	Beam Width
		Vertical 35°
3' (0.9 m)	94 fc (1,012 lx)	1.7' (0.5 m)
6' (1.8 m)	24 fc (253 lx)	3.4' (1.0 m)
9' (2.7 m)	10 fc (112 lx)	5.1' (1.6 m)
12' (3.7 m)	6 fc (64 lx)	6.8' (2.1 m)
15' (4.6 m)	9 fc (41 lx)	8.4' (2.6 m)
18' (5.5 m)	2.6 fc (28 lx)	10.1' (3.1 m)

MD ZD35WFL Illuminance at a Distance

Feet (Meter)	Center Beam	Beam Width
		Vertical 35°
3' (0.9 m)	94 fc (1,010 lx)	1.7' (0.5 m)
6' (1.8 m)	24 fc (253 lx)	3.4' (1.0 m)
9' (2.7 m)	10 fc (112 lx)	5.1' (1.6 m)
12' (3.7 m)	6 fc (64 lx)	6.8' (2.1 m)
15' (4.6 m)	4 fc (41 lx)	8.4' (2.6 m)
18' (5.5 m)	2.6 fc (28 lx)	10.1' (3.1 m)

POWER OPTIONS: Specify Separately

Power	Catalog No.	
Plug-In Transformer, 6 W	MT-6W	
	SURGE-MOD	

Power	Catalog No.	
Step-Down Transformer, UV (120/277 V to 12 V)	ST-UV	