

CA-51 Accent Light STANDARD PLUS




|           |
|-----------|
| PROJECT   |
| CATALOG # |
| TYPE      |
| NOTES     |

Combining elegant design with a durable, select brass construction, the Cora CA-51 Accent Light was built to outlast any landscape. Featuring black oxide stainless steel hardware for an extra layer of corrosion resistance, this multifunctional up/down light is especially well-suited for coastal regions and projects with modest budgets. Its accessory-friendly design also offers compatibility with various mounts and lenses.

Quick Facts

- Multidirectional fixture offers up/down capability for added design flexibility
- Solid brass construction and black oxide stainless steel hardware deliver strong corrosion resistance
- Antique bronze finish provides increased durability and elegant look
- Fully potted on the inside to prevent water intrusion in any orientation
- MR-16 lamp
- Available in 12-unit bulk packaging
- 10' (3 m) or 26' (8 m) lead

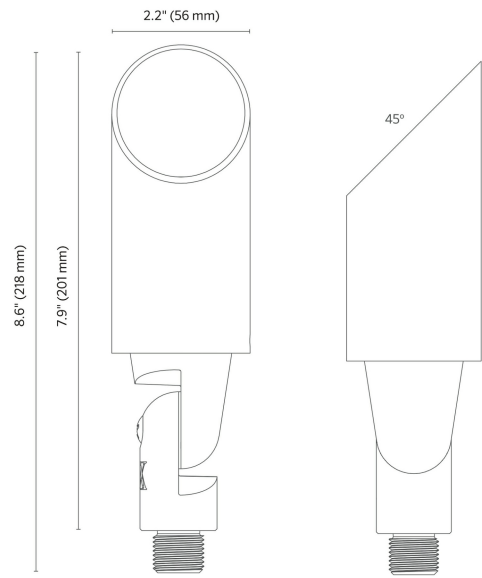

# CA-51 Accent Light SPECIFICATIONS

|                                    | E6WFL      | E9WFL      | P4WFL      | P5WFL      | P6WFL      |
|------------------------------------|------------|------------|------------|------------|------------|
| Total Lumens (lm)                  | 395        | 515        | 180        | 250        | 320        |
| Power Consumption (VA)             | 6.0        | 8.5        | 4.3        | 5.4        | 6.5        |
| Efficacy (lm/W)                    | 69         | 67         | 79         | 75         | 95         |
| Correlated Color Temperature (CCT) | 2700K      | 2700K      | 2700K      | 2700K      | 2700K      |
| Beam Angle                         | 30         | 30°        | 35°        | 35°        | 35°        |
| Maximum Candela (cd)               | 740        | 1,050      | --         | --         | --         |
| Color Rendering Index (CRI)        | 83+        | 83+        | 85+        | 85+        | 85+        |
| Input Voltage (V)                  | 10-15      | 10-15      | 10-15      | 10-15      | 10-15      |
| Minimum Rated Life (L70)           | 30,000 Hrs | 30,000 Hrs | 40,000 Hrs | 40,000 Hrs | 40,000 Hrs |

# CA-51 Accent Light SPECIFICATIONS

## About FX Luminaire

As a leading manufacturer of landscape and architectural lighting, FX Luminaire provides innovative products, resources, and support to help customers bring their visions to life. The company offers a range of specification-driven solutions, including fixtures, controls, and accessories, to enhance residential and commercial landscapes.

## Materials

Select brass housing and shield with black oxide stainless steel hardware

## Threads

½"-14 NPSM

## Dimming

Primary: Consult transformer specifications. Secondary: Luxor® control (with ZD lamp) or a trailing-edge (reverse phase-cut) dimmer

## Adjustability

Compress-and-lock features prevent slip after installation. Offers 9° increments of adjustability over 220° of vertical alignment.

## Finish

Antique Bronze finish sealed with a clear TGIC powder-coat layer

## Hardware

Black oxide stainless steel adjustment screws.

## Wiring

18 AWG (1 mm); SPT-1W; 220°F (105°C); 300 V; 10' (3 m) or 26' (8 m) length, measured from the light aperture

## Sockets

MR-16 GU5.3 socket with retaining clips. Ceramic socket base with heat-resistant contact pad. Stainless steel retaining clips ensure high spring force retention.

## Glare Control

45° angled shield

## Weight

2.0 lb (0.9 kg)

## Installation Accessories (Included)

Item ships with a 7" ABS slotted stake or wall mount.

## Lens

OptiClear™ tempered glass for exceptional optical purity and load strength

## Ambient Operating Temperature

0°F to 140°F (-18°C to 60°C)

## Input Voltage

10 to 15 VAC/VDC, 50/60 Hz  
Remote transformer required (specify separately)

## Sustainability

Innovation meets conservation in the design and manufacturing of our products. Where we can, we use recycled materials while maintaining superior functionality. Our LED products provide high-quality light at optimal energy efficiency, lifespan, and durability.

## Installation Requirements

Designed for installation in the upward or downward lighting directions

## Lens Transparency

Clear

## Manufacturing

ISO 9001:2015 certified facility

## Warranty

Fixture: 10-year limited  
Included Lamp: 5-year limited

## Listings



# CA-51 Accent Light ORDERING INFORMATION

| Fixture Power |                                         | Color Temp               | Beam Angle                    | Finish                      | Wire Lead Packaging                                                                                             |                                                                    |
|---------------|-----------------------------------------|--------------------------|-------------------------------|-----------------------------|-----------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------|
| CA-51         | <b>E6</b><br>6.0 VA, MR-16 Eco LED Lamp | <b>W</b><br>Warm (2700K) | <b>FL</b><br>Flood (35°)      | <b>FB</b><br>Black          |  <b>[default]</b><br>10' (3 m) | <b>[default]</b><br>(Standard packaging)                           |
|               | <b>E9</b><br>8.5 VA, MR-16 Eco LED Lamp | <b>S</b><br>Soft (3000K) | <b>WF</b><br>Wide Flood (60°) | <b>AB</b><br>Antique Bronze |  <b>XL</b><br>26' (8 m)        | <b>BP12</b><br>(Bulk pack of 12 units; specify in multiples of 12) |
|               | <b>P4</b><br>4.3 VA, MR-16 Pro LED Lamp |                          |                               |                             |                                                                                                                 |                                                                    |
|               | <b>P5</b><br>5.4VA, MR-16 Pro LED Lamp  |                          |                               |                             |                                                                                                                 |                                                                    |
|               | <b>ZD5</b><br>5.4 VA, MR-16 ZD LED Lamp |                          |                               |                             |                                                                                                                 |                                                                    |
|               | <b>NL</b><br>Lamp not included          |                          |                               |                             |                                                                                                                 |                                                                    |

-

-

-

-

-

-

CA51-XXXXXXXX-XX-AB

CA51-E6WFL-AB - Illuminance at a Distance

| Distance      | Center Beam fc     | Beam Width      |                   |
|---------------|--------------------|-----------------|-------------------|
| Feet (Meters) | Foot-Candles (Lux) | Vertical : 32 ° | Horizontal : 33 ° |
| 50' (15 m)    | 0.3 fc (3 lx)      | 28' (9 m)       | 29' (9 m)         |
| 40' (12 m)    | 0.5 fc (5 lx)      | 23' (7 m)       | 23' (7 m)         |
| 30' (9 m)     | 0.8 fc (9 lx)      | 17' (5 m)       | 18' (5 m)         |
| 20' (6 m)     | 1.8 fc (19 lx)     | 11' (3 m)       | 12' (4 m)         |
| 10' (3 m)     | 7.4 fc (80 lx)     | 6' (2 m)        | 6' (2 m)          |

CA51-E9WFL-AB - Illuminance at a Distance

| Distance      | Center Beam fc     | Beam Width      |                   |
|---------------|--------------------|-----------------|-------------------|
| Feet (Meters) | Foot-Candles (Lux) | Vertical : 29 ° | Horizontal : 29 ° |
| 50' (15 m)    | 0.4 fc (4 lx)      | 26' (8 m)       | 26' (8 m)         |
| 40' (12 m)    | 0.7 fc (8 lx)      | 21' (6 m)       | 21' (6 m)         |
| 30' (9 m)     | 1.2 fc (13 lx)     | 16' (5 m)       | 15' (5 m)         |
| 20' (6 m)     | 2.6 fc (28 lx)     | 11' (3 m)       | 10' (3 m)         |
| 10' (3 m)     | 10.5 fc (113 lx)   | 5' (2 m)        | 5' (2 m)          |

# CA-51 Accent Light ORDERING INFORMATION

MOUNTING OPTIONS: Specify Separately

| Mounts                           | Catalog No.             |                                                                                     | Mounts                                                           | Catalog No.   |                                                                                       |
|----------------------------------|-------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------|---------------|---------------------------------------------------------------------------------------|
| Long Slot Spike                  | 250015840000            |    | Three-Prong Spike                                                | 250020020000  |    |
| Lock Ring                        | 250030410000SP          |    | Super Slot Spike                                                 | 753900        |    |
| Mini Mount for Cora Collection   | BM-050-C-AB             |    | CE Certified Spike                                               | eKitSpike     |    |
| Gutter Mount                     | GM-SS                   |    | Ground Mount for 2.0" Schedule 40 Post Mounting with 1/2" Thread | GM-XX*        |    |
| 2.5" Post Mount with Stabilizer  | LS6054                  |    | Mini J-Box for 1/2" Thread                                       | MJB-050-XX*   |    |
| ProAim® Ratcheting Spike         | PARS                    |    | Post Mount for 1.5" Schedule 40 Post Mounting with 1/2" Thread   | PM-XX*        |    |
| 1.25" (32MM) Select Brass Riser  | RSR-S-125-XX*-R-MF-B-XX |    | Super J-Box Spike                                                | SJ-XX*        |    |
| TreeBox® Mount with 1/2" Thread  | TB-XX*                  |   | Tree Ring                                                        | TR-YY*-8P-XX* |   |
| VersaBox® Mount with 1/2" Thread | VB-050-XX*              |  | Variable Height Riser for Up Lights                              | VHR-UL        |  |

GLARE CONTROL: Specify Separately

| Glare Control                  | Catalog No.  |                                                                                   |
|--------------------------------|--------------|-----------------------------------------------------------------------------------|
| Hex Baffle for MR-16 LED Lamps | 250015260000 |  |

| Glare Control | Catalog No. |
|---------------|-------------|
|---------------|-------------|

LENS OPTIONS: Specify Separately

| Lenses                                      | Catalog No.  |                                                                                   | Lenses                                | Catalog No.  |                                                                                     |
|---------------------------------------------|--------------|-----------------------------------------------------------------------------------|---------------------------------------|--------------|-------------------------------------------------------------------------------------|
| MR-16 Linear Spread Lens                    | 250013550000 |  | MR-16 Frosted Lens LED Lamps          | 250015170000 |  |
| MR-16 Foliage-Enhancing Green Dichroic Lens | 250015180000 |  | MR-16 Color-Cooling Lens, +600K Shift | 250015190000 |  |
| MR-16 Color-Softening Lens, +100K Shift     | 250015200000 |  | MR-16 Green Light Dichroic Lens       | 250015210000 |  |
| MR-16 Red Light Dichroic Lens               | 250015220000 |  | MR-16 Solite Spread Lens              | 250015240000 |  |

# CA-51 Accent Light ORDERING INFORMATION

POWER OPTIONS: Specify Separately

| Power                                         | Catalog No. |                                                                                    | Power                                           | Catalog No. |                                                                                      |
|-----------------------------------------------|-------------|------------------------------------------------------------------------------------|-------------------------------------------------|-------------|--------------------------------------------------------------------------------------|
| Low-Voltage Dimmer                            | DIM-LV      |   | DX Controller, 150 W, Matte Gray                | DX-150-M    |   |
| DX Controller, 150 W, Stainless Steel         | DX-150-SS   |   | DX Controller, 300 W, Matte Gray                | DX-300-M    |   |
| DX Controller, 300 W, Stainless Steel         | DX300SS     |   | EX Transformer, 150 W, Matte Gray               | EX-150-M    |   |
| EX Transformer, 150 W, Stainless Steel        | EX-150-SS   |   | Luxor Low-Voltage CUBE                          | LCM-LV      |   |
| Mini Plug-In Transformer, 30 W                | MT-30W      |   | Plug-In Transformer, 6 W                        | MT-6W       |   |
| PX Transformer, 300 W                         | PX-300-SS   |   | PX Transformer, 600 W                           | PX-600-SS   |   |
| PX Transformer, 900 W                         | PX-900-SS   |   | Step-Down Transformer, Dimmable (120 V to 12 V) | ST-120-DIM  |   |
| Step-Down Transformer, UV (120/277 V to 12 V) | ST-UV       |  |                                                 | SURGE-MOD   |  |

SPLICING OPTIONS: Specify Separately

| Splicing                                     | Catalog No. |                                                                                   | Splicing                                     | Catalog No. |                                                                                     |
|----------------------------------------------|-------------|-----------------------------------------------------------------------------------|----------------------------------------------|-------------|-------------------------------------------------------------------------------------|
| Brass Lug Wire Connectors, 2-pack            | WCHSBS2     |  | Brass Lug Wire Connectors, 50-item Bulk Pack | WCHSBS50    |  |
| Heat Shrink Wire Connectors, 20-pack, Medium | WCHSMD20    |  | Heat Shrink Wire Connectors, 20-pack, Small  | WCHSSM20    |  |
| Ratcheting Crimper Tool                      | WCHSTOOL    |  |                                              |             |                                                                                     |