



PROJECT _____

CATALOG # _____

TYPE _____



NOTES _____

EX Transformer

The EX transformer provides an economical, low-wattage power and control option for LED lighting projects.

Quick Facts

- 150 watts
- Single 15-volt output tap
- Compact design
- Powder-coated steel
- Compatible with most plug-in astronomical timers and photocells

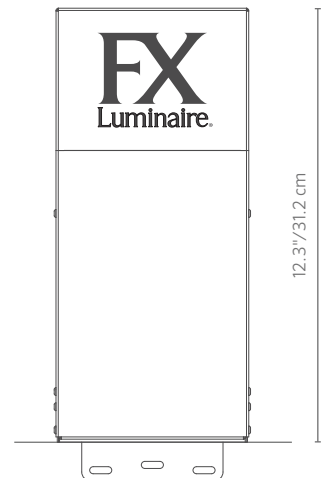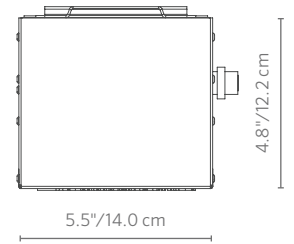

EX Transformer SPECIFICATIONS AND ORDERING INFORMATION

Output

Power	150 watts
Input Primary	120 volts, 60 Hz
Input Amperage Primary	1.4
Output Voltage Secondary	14 VAC
Maximum Open Circuit Volts	15 VAC
Class	2

FX Luminaire

FX Luminaire is an industry-leading manufacturer of landscape and architectural lighting products with a focus on the advancement of LED technology and digital lighting control with zoning, dimming, and color adjustment capabilities. We offer a full spectrum of highly efficient lighting fixtures that can be used to create elegant landscape lighting systems for commercial or residential applications. Our products are available exclusively via our extensive professional distributor network.

Materials

Powder coated steel outer box.

Wiring

Heavy-gauge, grounded, water-resistant power cord with integrally molded plug; 6-foot length.

Standard low-voltage lighting wire required (e.g., 12-2, 10-2, etc.) between controller and fixtures. No additional communication wire is required.

Power

Input: 120 VAC, 60 Hz.
Output: 14 VAC.

Finish

Matte gray powder coat finish.

Weight

15.1 lbs.

Hardware

Two 1½-inch pan head machined mounting screws with plastic anchors. Mounting brackets attached to transformer box.

Ambient Operating Temperature

0°F to 140°F

Sustainability

Innovation meets conservation in the design and manufacturing of our products. Where we can, we use recycled materials while maintaining superior functionality. Our LED products provide high-quality light at optimal energy efficiency, lifespan, and durability.

Installation Requirements

Designed for installation on a vertical surface in the upright position only.

Warranty


10-year limited warranty.

Listings

UL-1838




ORDERING INFORMATION

Item	Wattage	Finish
EX Transformer	■ 150 150 Watts	■ M Matte Gray 

EXAMPLE TRANSFORMER CONFIGURATION: EX-150-M



ACCESSORIES: Specify Separately

Item	Code	
■ MECHANICAL TIMER plug-in	PXTIMER	
■ PX TRANSFORMER SYNCHRONIZER plug-in, 24 VAC input	PXSYNC	